

ORWAK

FLEX 4660

FLEX

OUR IN-BIN COMPACTOR FOR 660 L BINS

efficiently reduces the volume of bagged waste and offers maximum safety for the operator and staff in the vicinity. A side rail supports the press head when sliding it sideways to load the bin.



Safety



Orwak benefits

MORE PRODUCTIVE USE OF TIME

Less time spent on waste handling, more time for your core activities!

MORE SPACE & ORDER

Our balers rapidly minimizes the space the waste takes up, keeping aisles free and tidy.

LESS COSTS, MORE VALUE

More compaction = less waste volume to transport. Fewer transports required results in lower transportation costs and reduced CO₂ emissions. Sorting at source yields a higher quality of waste material for recycling.



Why Orwak Flex?

- + Versatile compaction for many different application areas
- + Hygienic and safe compaction and disposal of mixed or hazardous waste
- + Special solutions for special needs

ORWAK FLEX 4660

Smart in bin compaction solution

ORWAK FLEX 4660 IS OPTIMIZED FOR:

SEMI-DRY WASTE

+ Bagged general waste

Best suited for dry or semi-dry waste destined for landfill or incineration

ORWAK FLEX 4660 is an in-bin waste compactor for standard two-wheeled 660 L bins. Easily slide the press head on to the side rail when disposing of waste in the bin and slide it back for compaction.

IDEAL FOR GENERAL WASTE

The 4660 is perfect for the hotel and restaurant sector, where general waste needs to be disposed of in waste bins. The in-bin compactor provides impressive volume reduction, contributing to valuable

SMART DESIGN

The 4660 is a robust and stable machine and is delivered with a side rail. A good finish and easy access make cleaning quick and easy. A lifting device relieves the pressure on the wheels of the bin and protects them from being damaged during the compaction process.

SAFE AND USER-FRIENDLY

Model 4660 is user-friendly as it is based on an easy wheel-in, wheel-out operation. The bin is placed in a closed chamber during compaction. Safety and quality are our hallmarks, and the compactor provides maximum personal safety both for the operator and those in the immediate vicinity.

Top loading for convenient waste disposal

Easy to slide the press head sideways to rest on the side rail

Fits standard 660 liter bins of the most common brands in the market.

The lifting plate protects the bin wheels from damage during the compaction procedure.




DIMENSIONS & SPECIFICATIONS

DIMENSIONS ORWAK FLEX 4660

A*	B	C	D	E
2275-2325 mm (incl. feet 50-100 mm)	2170 mm	940 mm	1700 mm	1220 mm

* Transport height 2375 mm

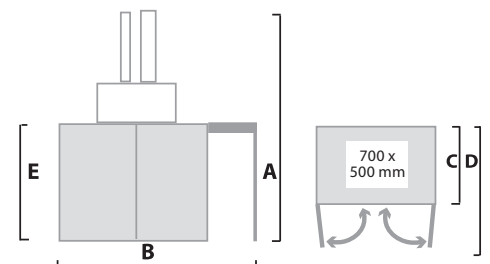

TECHNICAL SPECIFICATIONS

BIN SIZE	CYCLE TIME	PRESS FORCE	NOISE LEVEL	PROTECTION CLASS	OPERATING POWER
660 L	36 secs	3 ton, 30 kN	<70 db (A)	IP 55	Single phase 230 V, 50 Hz, 10 A

We reserve the right to make changes to specifications without prior notice. Bale/bag/bin weights are dependent upon material type.